

# Axial Piston Variable Double Pump A20VG/A22VG

**RA 93220-A/10.10** 1/28  
Replaces: 05.09

## Data sheet

Series 11  
Sizes 45  
A20VG Nominal pressure 4350 psi (300 bar)  
Maximum pressure 5100 psi (350 bar)  
A22VG Nominal pressure 5100 psi (350 bar)  
Maximum pressure 6100 psi (420 bar)  
Closed circuit



## Contents

Ordering code for standard program	2
Technical data	4
HW – Proportional control hydraulic, mechanical servo	9
EP – Proportional control electric	11
HT – Hydraulic control, direct controlled	13
ET – Electric control, direct controlled	14
DA control valve, fixed setting	15
Dimensions size 45	16
Through drive dimensions	20
Overview of attachments	21
Combination pumps	22
Boost pump	22
High-pressure relief valves	22
Mechanical stroke limiter	23
Ports X <sub>3</sub> and X <sub>4</sub> for stroking chamber pressure	23
Sensors	24
Installation situation for coupling assembly	25
Connector for solenoids	25
Installation instructions	26
General instructions	28

## Features

- Variable double pump with two axial piston rotary groups with swashplate design for hydrostatic drives in closed circuit
- The flow is proportional to the drive speed and displacement.
- The flow increases as the angle of the swashplate is adjusted from zero to its maximum value.
- Flow direction changes smoothly when the swashplate is moved through the neutral position.
- Only one shared port for case drain fluid for both circuits
- Service line ports alternatively left or right (viewed from drive shaft)
- Compact design for tight installation conditions

### Note

Only for series no smaller than 200 units per year.  
Please consult us regarding smaller series.

# Ordering code for standard program

	<b>G</b>	<b>045</b>							/	<b>11</b>	<b>A</b>		<b>N</b>	<b>B2</b>					<b>A</b>	
01	02	03	04	05	06	07	08	09		10	11	12	13	14	15	16	17	18	19	20

## Axial piston unit

01	Swashplate design, variable	Nominal pressure 4350 psi (300 bar), maximum pressure 5100 psi (350 bar)	<b>A20V</b>
		Nominal pressure 5100 psi (350 bar), maximum pressure 6100 psi (420 bar)	<b>A22V</b>

## Operation mode

02	Double pump, closed circuit	<b>G</b>
----	-----------------------------	----------

## Size (NG)

03	Theoretical displacement see table of values on page 7	in cm <sup>3</sup>	<b>045</b>
		in in <sup>3</sup> /rev	<b>2.81</b>

## Control device

04	Proportional control hydraulic mechanical servo, hexagon shaft	without neutral position switch	●	<b>HW1</b>
		with neutral position switch	●	<b>HW7</b>
	Proportional control electric	U = 12 V DC	●	<b>EP1</b>
		U = 24 V DC	●	<b>EP2</b>
	Hydraulic control, direct controlled		●	<b>HT1</b>
	Electric control, direct controlled, two pressure reduction valves (DRE) per circuit	U = 12 V DC	○	<b>ET1</b>
U = 24 V DC		○	<b>ET2</b>	

## Connector for solenoids<sup>1)</sup>

05	Without	<b>0</b>
	DEUTSCH - molded connector, 2-pin – without suppressor diode	<b>P</b>

## Swivel angle indicator

06	Without	<b>0</b>
	Electric swivel angle sensor <sup>2)</sup>	<b>R</b>

## Auxiliary function 1 (pilot pressure port)

07	With ports X <sub>1</sub> and X <sub>2</sub>	<b>1</b>
	With ports X <sub>3</sub> and X <sub>4</sub>	<b>3</b>
	With ports X <sub>1</sub> , X <sub>2</sub> and X <sub>3</sub> , X <sub>4</sub>	<b>4</b>

## Auxiliary function 2 (mechanical stroke limiter)

08	Without	<b>0</b>
	With mechanical stroke limiter on one side, externally variable, on the same side as the service line ports	<b>E</b>
	With mechanical stroke limiter on both sides, externally variable	<b>M</b>

## DA control valve

		<b>HW</b>	<b>HT</b>	<b>EP</b>	<b>ET</b>	
09	Without	●	●	●	○	<b>0</b>
	With DA control valve fixed setting	○	●	○	-	<b>1</b>

## Series

10	Series 1, Index 1	<b>11</b>
----	-------------------	-----------

## Version of port and fixing threads

11	ANSI	<b>A</b>
----	------	----------

● = Available      ○ = On request      - = Not available

1) Connectors for other electric components can deviate.

2) See page 24

# Ordering code for standard program

	<b>G</b>	<b>045</b>								<b>/</b>	<b>11</b>	<b>A</b>		<b>N</b>	<b>B2</b>					<b>A</b>	
01	02	03	04	05	06	07	08	09			10	11	12	13	14	15	16	17	18	19	20

### Direction of rotation

12	Viewed from drive shaft	clockwise	<b>R</b>
		counter-clockwise	<b>L</b>

### Seals

13	NBR (nitrile-caoutchouc), shaft seal ring in FKM (fluor-caoutchouc)	<b>N</b>
----	---	----------

### Mounting flange

14	SAE J744	101-2 (B)	<b>B2</b>
----	----------	-----------	-----------

### Drive shaft

15	Splined shaft ANSI B92.1a-1976	1 in 15T 16/32DP	<input type="radio"/>	<b>S5</b>
		1 1/4 in 14T 12/24DP	<input checked="" type="radio"/>	<b>S7</b>

### Service line ports

16	SAE threaded ports A and B, left (viewed from drive shaft)	<b>3</b>
	SAE threaded ports A and B, right (viewed from drive shaft)	<b>4</b>

### Boost pump

17	Without boost pump (standard) <sup>3)</sup>	<b>U</b>
	With boost pump <sup>3)</sup>	<b>F</b>

### Through drive

18	Flange SAE J744	Mounting variant		Coupling for splined shaft <sup>4)</sup>					
		Symbol <sup>5)</sup>	Designation	Diameter	Designation				
	Without							<input type="radio"/>	<b>0000</b>
	82-2 (A)	∞	A2	5/8 in 9T 16/32DP	S2			<input checked="" type="radio"/>	<b>A2S2</b>
	101-2 (B)	∞	B2	7/8 in 13T 16/32DP	S4			<input checked="" type="radio"/>	<b>B2S4</b>
				1 in 15T 16/32DP	S5			<input checked="" type="radio"/>	<b>B2S5</b>

### High-pressure valves

19	With high-pressure relief valve, direct controlled	without bypass	3600 to 4650 psi (250 to 320 bar) (A20VG)	<b>A</b>
			3600 to 5650 psi (250 to 390 bar) (A22VG)	

### Standard / special version

20	Standard version	<b>-0</b>
	combined with attachment part or attachment pump	<b>-K</b>
	Special version	<b>-S</b>
	combined with attachment part or attachment pump	<b>-T</b>

### Note

This unit is only available "without pressure cut-off".

Short designation X on a feature refers to a special version not covered by the ordering code.

● = Available      ○ = On request      - = Not available

- 3) For pressure filtration, the feed is performed via port G.  
Pressure or suction filtration to be provided by the customer.
- 4) Coupling for splined shaft acc. ANSI B92.1a-1976
- 5) Order of fixing bores viewed from through drive

# Technical data

## Hydraulic fluid


Before starting project planning, please refer to our data sheets RE 90220 (mineral oil) and RE 90221 (environmentally acceptable hydraulic fluids) for detailed information regarding the choice of hydraulic fluid and application conditions.

The A20VG/A22VG variable pump is not suitable for operation with HFA, HFB and HFC hydraulic fluid. If HFD or environmentally acceptable hydraulic fluids are being used, the limitations regarding technical data and seals must be observed.

Please contact us.

When ordering, indicate the hydraulic fluid that is to be used.

### Selection diagram

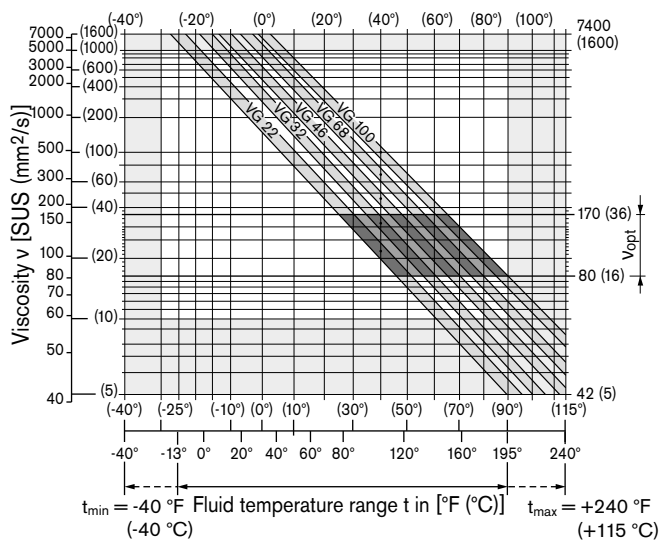

### Details regarding the choice of hydraulic fluid

The correct choice of hydraulic fluid requires knowledge of the operating temperature in relation to the ambient temperature: in a closed circuit the circuit temperature.

The hydraulic fluid should be chosen so that the operating viscosity in the operating temperature range is within the optimum range ( $v_{\text{opt}}$ ), see shaded area of the selection diagram. We recommend that the higher viscosity class be selected in each case.

Example: At an ambient temperature of  $X\text{ °F}$  ( $X\text{ °C}$ ), an operating temperature of  $140\text{ °F}$  ( $60\text{ °C}$ ) is set in the circuit. In the optimum operating viscosity range ( $v_{\text{opt}}$ , shaded area), this corresponds to the viscosity classes VG 46 or VG 68; to be selected: VG 68.

### Note

The case drain temperature, which is affected by pressure and speed, is always higher than the circuit temperature. At no point of the component may the temperature be higher than  $240\text{ °F}$  ( $115\text{ °C}$ ), however. The temperature difference specified below is to be taken into account when determining the viscosity in the bearing.

If the above conditions cannot be maintained due to extreme operating parameters, please contact us.

### Viscosity and temperature

	Viscosity [SUS (mm <sup>2</sup> /s)]	Temperature	Comment
Transport and storage		$T_{\min} \geq -58\text{ °F}$ ( $-50\text{ °C}$ ) $T_{\text{opt}} = +41\text{ °F}$ to $+68\text{ °F}$ ( $+5\text{ °C}$ to $+20\text{ °C}$ )	up to 12 months with standard factory preservation up to 24 months with long-term factory preservation
(Cold) start-up <sup>1)</sup>	$v_{\max} = 7400$ (1600)	$T_{\text{St}} \geq -40\text{ °F}$ ( $-40\text{ °C}$ )	$t \leq 3\text{ min}$ , without load ( $p \leq 725\text{ psi}$ (50 bar)), $n \leq 1000\text{ rpm}$
Permissible temperature difference		$\Delta T \leq 45\text{ °F}$ ( $25\text{ °C}$ )	between axial piston unit and hydraulic fluid
Warm-up phase	$v < 7400$ to 1850 (1600 to 400)	$T = -40\text{ °F}$ to $-13\text{ °F}$ ( $-40\text{ °C}$ to $-25\text{ °C}$ )	at $p_{\text{nom}}$ , $0.5 \cdot n_{\text{nom}}$ and $t \leq 15\text{ min}$
Operating phase			
Temperature difference		$\Delta T = \text{approx. } 9\text{ °F}$ ( $5\text{ °C}$ )	between hydraulic fluid in the bearing and the case drain fluids at port T.
Maximum temperature		$240\text{ °F}$ ( $115\text{ °C}$ ) $230\text{ °F}$ ( $110\text{ °C}$ )	in bearing measured at port T
Continuous operation	$v = 1850$ to 60 (400 to 10) $v_{\text{opt}} = 80$ to 170 (16 to 36)	$T = -13\text{ °F}$ to $+195\text{ °F}$ ( $-25\text{ °C}$ to $+90\text{ °C}$ )	measured at port T, no restriction within the permissible data
Short-term operation	$v_{\min} < 60$ to 42 (10 to 5)	$T_{\max} = +230\text{ °F}$ ( $+110\text{ °C}$ )	measured at port T, $t < 3\text{ min}$ , $p < 0.3 \cdot p_{\text{nom}}$
Shaft seal ring FKM <sup>1)</sup>		$T \leq +240\text{ °F}$ ( $+115\text{ °C}$ )	see page 5

1) At temperatures below  $-13\text{ °F}$  ( $-25\text{ °C}$ ), an NBR shaft seal ring is required (permissible temperature range:  $-40\text{ °F}$  to  $+195\text{ °F}$  ( $-40\text{ °C}$  to  $+90\text{ °C}$ )).

## Technical data

### Filtration of the hydraulic fluid

Filtration improves the cleanliness level of the hydraulic fluid, which, in turn, increases the service life of the axial piston unit.

To ensure the functional reliability of the axial piston unit, a gravimetric evaluation is necessary for the hydraulic fluid to determine the amount of contamination by solid matter and to determine the cleanliness level according to ISO 4406. A cleanliness level of at least 20/18/15 is to be maintained.

Depending on the system and the application, for the A20VG and A22VG, we recommend

Filter cartridges  $\beta_{20} \geq 100$ .

With an increasing differential pressure at the filter cartridges, the  $\beta$ -value must not deteriorate.

At very high hydraulic fluid temperatures 195 °F to maximum 240 °F (90 °C to maximum 115 °C), a cleanliness level of at least 19/17/14 according to ISO 4406 is necessary.


If the above classes cannot be achieved, please contact us.

### Shaft seal ring

#### Permissible pressure loading

The service life of the shaft seal ring is affected by the speed of the pump and the case drain pressure. It is recommended that the average, continuous case drain pressure 45 psi (3 bar) absolute at operating temperature not be exceeded (maximum permissible case drain pressure 90 psi (6 bar) absolute at reduced speed, see diagram). Short-term ( $t < 0.1$  s) pressure spikes of up to 145 psi (10 bar) absolute are permitted. The service life of the shaft seal ring decreases with an increase in the frequency of pressure spikes.

The case pressure must be equal to or greater than the external pressure on the shaft seal ring.

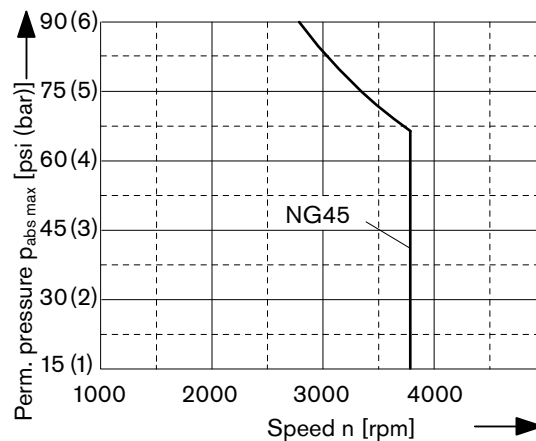

#### Temperature range

The FKM shaft seal ring may be used for case drain temperatures from -13 °F to +240 °F (-25 °C to +115 °C).

#### Note

For application cases below -13 °F (-25 °C), an NBR shaft seal ring is necessary (permissible temperature range: -40 °F to +195 °F (-40 °C to +90 °C)).

State NBR shaft seal ring in plain text when ordering. Please contact us.

# Technical data

## Operating pressure range

### Variable double pump A20VG

Pressure at service line port A or B

**Nominal pressure**  $p_{nom}$  \_\_\_\_\_ 4350 psi (300 bar) absolute

**Maximum pressure**  $p_{max}$  \_\_\_\_\_ 5100 psi (350 bar) absolute

Single operating period \_\_\_\_\_ 10 s

Total operating period \_\_\_\_\_ 300 h

### Variable double pump A22VG

Pressure at service line port A or B

**Nominal pressure**  $p_{nom}$  \_\_\_\_\_ 5100 psi (350 bar) absolute

**Maximum pressure**  $p_{max}$  \_\_\_\_\_ 6100 psi (420 bar) absolute

Single operating period \_\_\_\_\_ 10 s


Total operating period \_\_\_\_\_ 300 h

### Variable double pump A20VG and A22VG

**Minimum pressure (high-pressure side)** \_\_\_\_\_ 365 psi (25 bar)

**Minimum pressure (inlet)** \_\_\_\_\_ 145 psi (10 bar)  
(boost pressure setting must be higher depending on system)

**Rate of pressure change**  $R_{A \max}$  \_\_\_\_\_ 130000 psi/s (9000 bar/s)

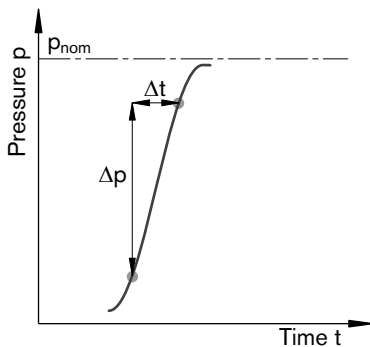

## Boost pump

### Pressure at suction port S

Duration  $p_{S \min}$  ( $v \leq 140$  SUS) \_\_\_\_\_  $\geq 12$  psi absolute  
( $v \leq 30$  mm<sup>2</sup>/s) \_\_\_\_\_  $\geq 0.8$  bar absolute)

at cold starts, short-term ( $t < 3$  min)  $\geq 7.5$  psi (0.5 bar) absolute

Maximum  $p_{S \max}$  \_\_\_\_\_  $\leq 75$  psi (5 bar) absolute

**Nominal pressure**  $p_{Sp \ nom}$  \_\_\_\_\_ 365 psi (25 bar)

**Maximum pressure**  $p_{Sp \ max}$  \_\_\_\_\_ 580 psi (40 bar)

### Control pressure

To ensure the function of the control, the following control pressure is required depending on the speed and operating pressure:

For controls EP and HW

Minimum control pressure

$p_{St \ min}$  (at  $n = 2000$  rpm) \_\_\_\_\_ 260 psi (18 bar)

For controls ET and HT

Minimum control pressure

$p_{St \ min}$  (at  $n = 2000$  rpm) \_\_\_\_\_ 365 psi (25 bar)

## Definition

### Nominal pressure $p_{nom}$

The nominal pressure corresponds to the maximum design pressure.

### Maximum pressure $p_{max}$

The maximum pressure corresponds to the maximum operating pressure within the single operating period. The sum of the single operating period must not exceed the total operating period.

### Minimum pressure (high-pressure side)


Minimum pressure on the high-pressure side (A or B) that is required in order to prevent damage to the axial piston unit.

### Minimum pressure (inlet)

Minimum pressure in inlet (A or B) that is required in order to prevent damage to the axial piston unit.

### Rate of pressure change $R_A$

Maximum permissible rate of pressure build-up and pressure reduction during a pressure change over the entire pressure range.

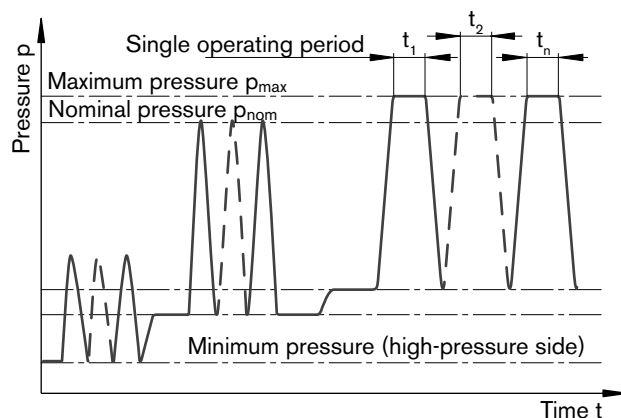

Total operating period =  $t_1 + t_2 + \dots + t_n$

# Technical data

**Table of values** (theoretical values, without efficiency and tolerances; values rounded)

Size		NG		45		
Displacement geometrical, per revolution	variable pump (for each rotary group)	$V_{g \max}$	in <sup>3</sup>	2.81		
			cm <sup>3</sup>	46		
	boost pump (at p = 290 psi (20 bar))	$V_{g Sp}$	in <sup>3</sup>	0.91		
			cm <sup>3</sup>	14.9		
Speed	at $V_{g \max}$	$n_{nom}$	rpm	3300		
	limited maximum <sup>1)</sup>	$n_{max \text{ limited}}$	rpm	3550		
	intermittent maximum <sup>2)</sup>	$n_{max \text{ intern.}}$	rpm	3800		
	minimum	$n_{min}$	rpm	500		
Flow	at $n_{nom}$ and $V_{g \max}$	$q_{v \max}$	gpm	2 x 40		
			l/min	2 x 152		
Power <sup>3)</sup>	at $n_{nom}$ , $V_{g \max}$ and					
			for A20VG $\Delta p = 4350 \text{ psi}$	$P_{max}$	hp	204
			$\Delta p = 300 \text{ bar}$	$P_{max}$	kW	152
			for A22VG $\Delta p = 5100 \text{ psi}$	$P_{max}$	hp	239
			$\Delta p = 350 \text{ bar}$	$P_{max}$	kW	177
Torque <sup>3)</sup>	at $V_{g \max}$ and					
			for A20VG $\Delta p = 4350 \text{ psi}$	$T_{max}$	lb-ft	324
			$\Delta p = 300 \text{ bar}$	$T_{max}$	Nm	439
			for A22VG $\Delta p = 5100 \text{ psi}$	$T_{max}$	lb-ft	380
			$\Delta p = 350 \text{ bar}$	$T_{max}$	Nm	512
			$\Delta p = 1450 \text{ psi}$	T	lb-ft	108
			$\Delta p = 100 \text{ bar}$	T	Nm	146
Rotary stiffness	drive shaft S7	c	lb-ft/rad	54435		
			Nm/rad	73804		
Moment of inertia	rotary group 1	$J_{GR}$	lb-ft <sup>2</sup>	0.078951		
			kgm <sup>2</sup>	0.003327		
	rotary group 2	$J_{GR}$	lb-ft <sup>2</sup>	0.078144		
			kgm <sup>2</sup>	0.003293		
Maximum angular acceleration for each rotary group <sup>4)</sup>		$\alpha$	rad/s <sup>2</sup>	4000		
Filling capacity		V	gal	0.4		
			L	1.7		
Mass approx. (without through drive)		m	lbs	121		
			kg	55		

1) Limited maximum speed: At half corner power (e. g. at  $V_{g \max}$  and  $p_{nom} / 2$ )

2) Intermittent maximum speed:

- At high idle speed
- At overspeed:  $\Delta p = 1000 \text{ to } 2200 \text{ psi}$  (70 to 150 bar) and  $V_{g \max}$
- At reversing peaks:  $\Delta p < 4350 \text{ psi}$  (300 bar) and  $t < 5 \text{ sec.}$

3) Without boost pump

4) The area of validity lies between the minimum required and maximum permissible speed.

It applies for external stimuli (e. g. engine 2 to 8 times rotary frequency, cardan shaft twice the rotary frequency).

The limit value applies for a single pump only.



The load capacity of the connection parts must be considered.

## Note

Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. We recommend testing the loads by means of experiment or calculation / simulation and comparison with the permissible values.

## Technical data

### Permissible radial and axial loading on drive shaft

Size	NG	45		
Drive shaft		in		
		1 1/4		
Radial force maximum at distance a (from shaft collar)		$F_{q \max}$	lb	717
			N	3190
		a	in	0.94
			mm	24
Axial force maximum		$\pm F_{ax \max}$	lb	337
			N	1500

#### Note

Special requirements apply in the case of belt drives. Please contact us.

Force-transfer direction of the permissible axial force:

+  $F_{ax \max}$  = Increase in service life of bearings

-  $F_{ax \max}$  = Reduction in service life of bearings (avoid)


### Permissible input and through-drive torques

Size	NG	45			
Torque <sup>1)</sup> at $V_{g \max}$ and	for A20VG	$\Delta p = 4350 \text{ psi}$	$T_{\max}$	lb-ft	324
		$(\Delta p = 300 \text{ bar})$		Nm	439
	for A22VG	$\Delta p = 5100 \text{ psi}$	$T_{\max}$	lb-ft	378
		$(\Delta p = 350 \text{ bar})$		Nm	512
Input torque at drive shaft maximum <sup>2)</sup>	<b>S7</b>	1 1/4 in	$T_{E \max}$	lb-ft	444
				Nm	602
Maximum through-drive torque	$T_{D1 \max}$		lb-ft	221	
			Nm	300	
	$T_{D2 \max}$		lb-ft	$T_{D2 \text{ perm}} = 221 - T_{A2}$	
			Nm	$T_{D2 \text{ perm}} = 300 - T_{A2}$	

1) Efficiency not considered

2) For drive shafts with no radial force

#### Torque distribution



#### Determining the size

$$\text{Flow } q_v = \frac{V_g \cdot n \cdot \eta_v}{231} \quad [\text{gpm}] \quad \left( \frac{V_g \cdot n \cdot \eta_v}{1000} \quad [\text{l/min}] \right) \quad \begin{array}{l} V_g = \text{Displacement per revolution in in}^3 \text{ (cm}^3\text{)} \\ \Delta p = \text{Differential pressure in psi (bar)} \end{array}$$

$$\text{Torque } T = \frac{V_g \cdot \Delta p}{24 \cdot \pi \cdot \eta_{mh}} \quad [\text{lb-ft}] \quad \left( \frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_{mh}} \quad [\text{Nm}] \right) \quad \begin{array}{l} n = \text{Speed in rpm} \\ \eta_v = \text{Volumetric efficiency} \end{array}$$

$$\text{Power } P = \frac{2 \pi \cdot T \cdot n}{33000} = \frac{q_v \cdot \Delta p}{1714 \cdot \eta_t} \quad [\text{hp}] \quad \left( \frac{2 \pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t} \quad [\text{kW}] \right) \quad \begin{array}{l} \eta_{mh} = \text{Mechanical-hydraulic efficiency} \\ \eta_t = \text{Total efficiency } (\eta_t = \eta_v \cdot \eta_{mh}) \end{array}$$




# HW – Proportional control hydraulic, mechanical servo

The output flow of the pump can be steplessly varied in the range between 0 to 100 %, proportional to the rotation of the control lever between 0° and ±29°.

A feedback lever connected to the stroke piston maintains the pump flow for any given position of the control lever between 0° and 29°.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

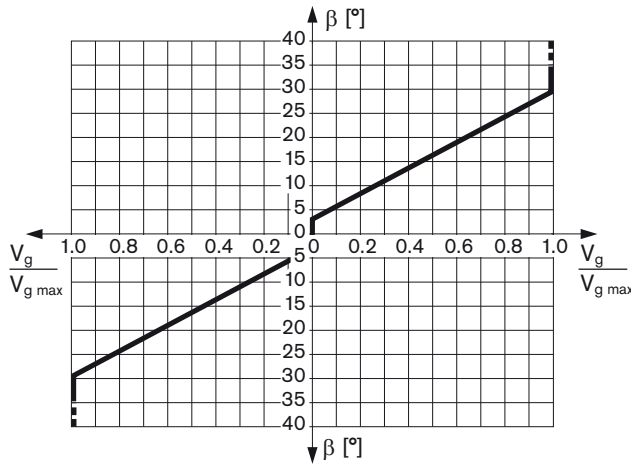

Swivel angle  $\beta$  at the control lever for deflection:

Start of control at  $\beta = 3^\circ$

End of control at  $\beta = 29^\circ$  (maximum displacement  $V_{g\ max}$ )

Mechanical stop for  $\beta: \pm 40^\circ$

The maximum required torque at the lever is 15 lb-in (170 Ncm). To prevent damage to the HW control unit, a positive mechanical stop must be provided for the HW control lever.

### Note

Spring centering enables the pump, depending on pressure and speed, to move automatically to the neutral position ( $V_g = 0$ ) as soon as there is no longer any torque on the control lever of the HW control unit (regardless of deflection angle).

### Variation: Neutral position switch


The switch contact in the neutral position switch is closed when the control lever on the HW control unit is in its neutral position. The switch opens if the control lever is moved out of neutral in either direction.

Thus, the neutral position switch provides a monitoring function for drive units that require the pump to be in the neutral position during certain operational states (e. g. starting diesel engines).

### Technical data, neutral position switch

Load capacity	20 A (continuous), without switching operating
Switching capacity	15 A / 32 V (ohmic load) 4 A / 32 V (inductive load)
Connector version	DEUTSCH DT04-2P-EP04 (for mating connector, see page 25)



### Circuit diagram

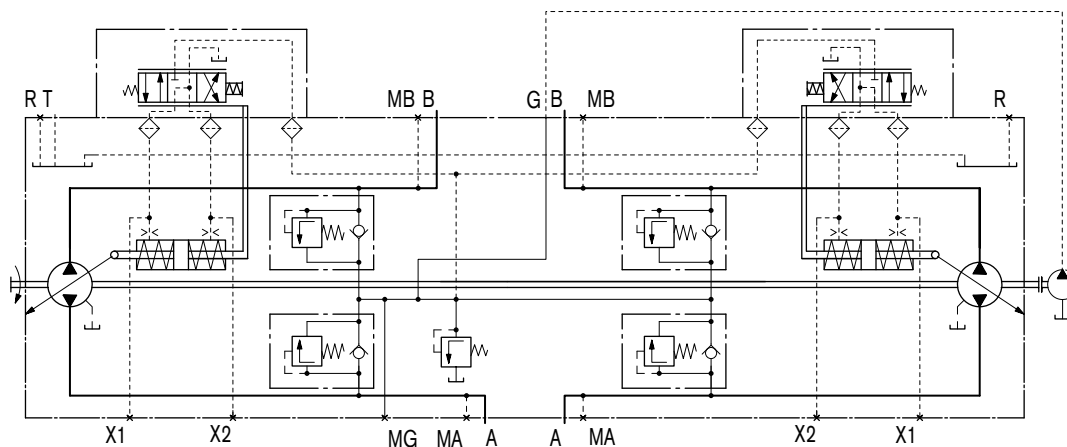

# HW – Proportional control hydraulic, mechanical servo

**Assignment**  
**Direction of rotation - Control - Flow direction**

Direction of rotation	Pump 1				Pump 2			
	clockwise		counter-clockwise		clockwise		counter-clockwise	
Lever direction	a	b	a	b	a	b	a	b
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	B to A	A to B	A to B	B to A	A to B	B to A	B to A	A to B
Operating pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>

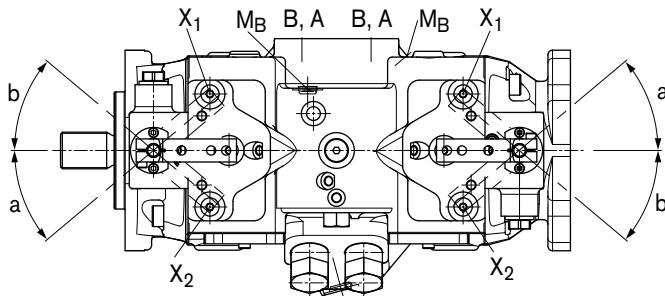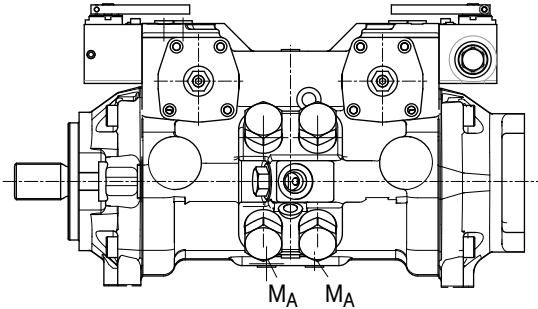


# EP – Proportional control electric

The output flow of the pump can be steplessly varied in the range between 0 to 100 %, in proportional to the electrical current supplied to solenoid a or b.

The electrical energy is converted into a force acting on the control piston. This control piston then directs control hydraulic fluid into and out of the stroke cylinder to adjust pump displacement as required.

A feedback lever connected to the stroke piston maintains the pump flow for any given current within the control range.

If the pump is also equipped with a DA control valve (see page 15), automotive operation is possible for travel drives.

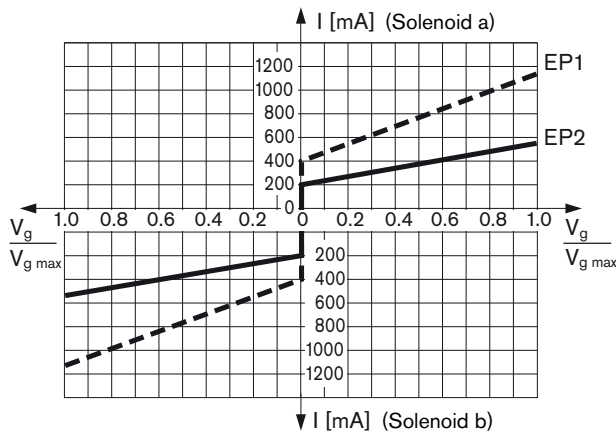


### Standard

Proportional solenoid without emergency actuation.

### On request

Proportional solenoid with emergency actuation and spring return.

### Circuit diagram

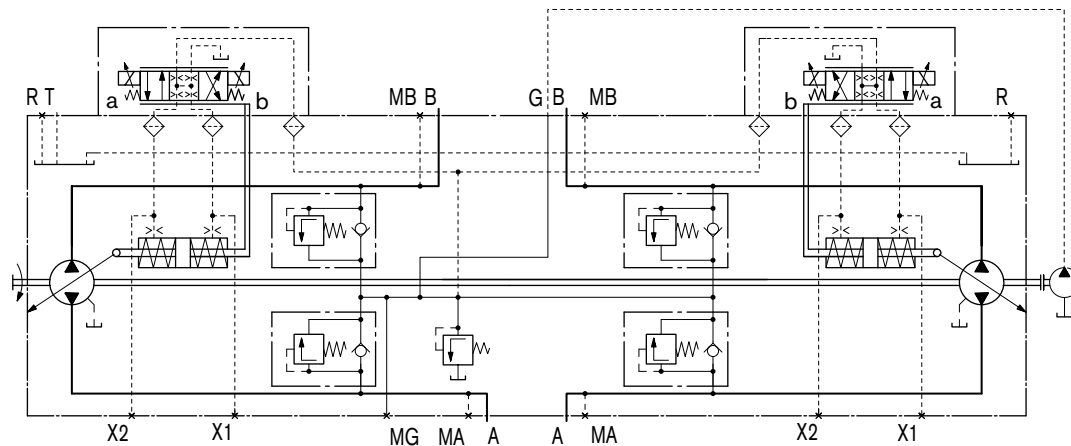

Technical data, solenoid	EP1	EP2
Voltage	12 V ( $\pm 20\%$ )	24 V ( $\pm 20\%$ )
Start of control at $V_{g0}$	400 mA	200 mA
End of control at $V_{g\max}$	1115 mA	560 mA
Limiting current	1.54 A	0.77 A
Nominal resistance at 68 °F (at 20 °C)	5.5 $\Omega$	22.7 $\Omega$
Dither frequency	100 Hz	100 Hz
Actuated time	100 %	100 %
Type of protection see connector design, page 25		

The following electronic controllers and amplifiers are available for controlling the proportional solenoids:

- BODAS controller RC
  - Series 20 \_\_\_\_\_ RE 95200
  - Series 21 \_\_\_\_\_ RE 95201
  - Series 22 \_\_\_\_\_ RE 95202
  - Series 30 \_\_\_\_\_ RE 95203
 and application software
- Analog amplifier RA \_\_\_\_\_ RE 95230

Further information can also be found on the Internet at: [www.boschrexroth.com/mobile-electronics](http://www.boschrexroth.com/mobile-electronics).

### Note

**The spring return feature in the control unit is not a safety device**



The spool valve inside the control unit can get stuck in an undefined position by internal contamination (contaminated hydraulic fluid, abrasion or residual contamination from system components). As a result, the axial piston unit can no longer supply the flow specified by the operator.

Check whether your application requires that remedial measures be taken on your machine in order to bring the driven consumer into a neutral position (e. g. immediate stop).

# EP – Proportional control electric

**Assignment**  
**Direction of rotation - Control - Flow direction**

Direction of rotation	Pump 1				Pump 2			
	clockwise		counter-clockwise		clockwise		counter-clockwise	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	A to B	B to A	B to A	A to B	B to A	A to B	A to B	B to A
Operating pressure	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>

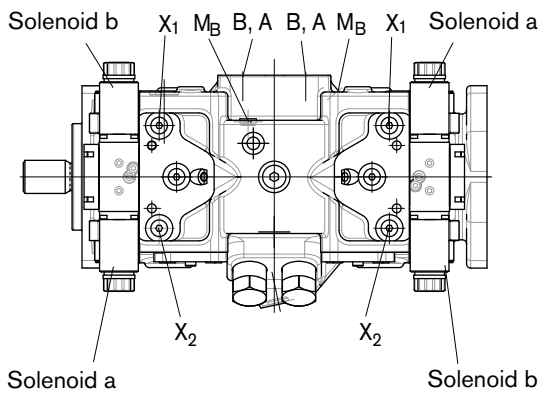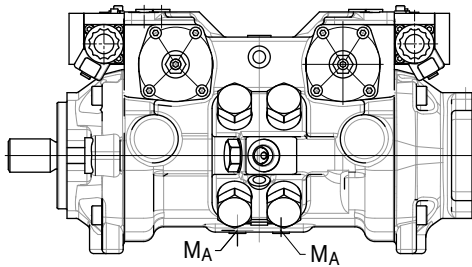

# HT – Hydraulic control, direct controlled

With the direct-controlled hydraulic control (HT), pump displacement is influenced by a hydraulic control pressure applied directly to the stroke piston through either port X<sub>1</sub> or X<sub>2</sub>.


The flow direction is dependent on which control pressure port is pressurized.

Pump displacement is steplessly variable and proportional to the applied control pressure, but is also influenced by system pressure and pump drive speed.


Maximum permissible control pressure: 580 psi (40 bar)

*Use of the HT control requires a review of the engine and vehicle parameters to ensure that the pump is set up correctly. We recommend that all HT applications be reviewed by a Rexroth application engineer.*

The DA control valve is only effective if the pilot control device for actuating the HT control is powered from port Y.

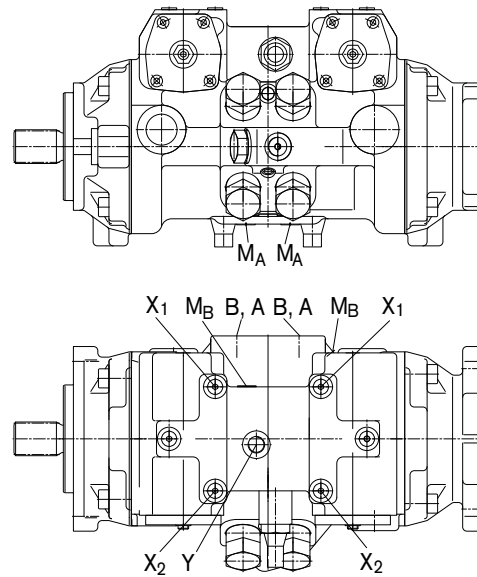

### Circuit diagram

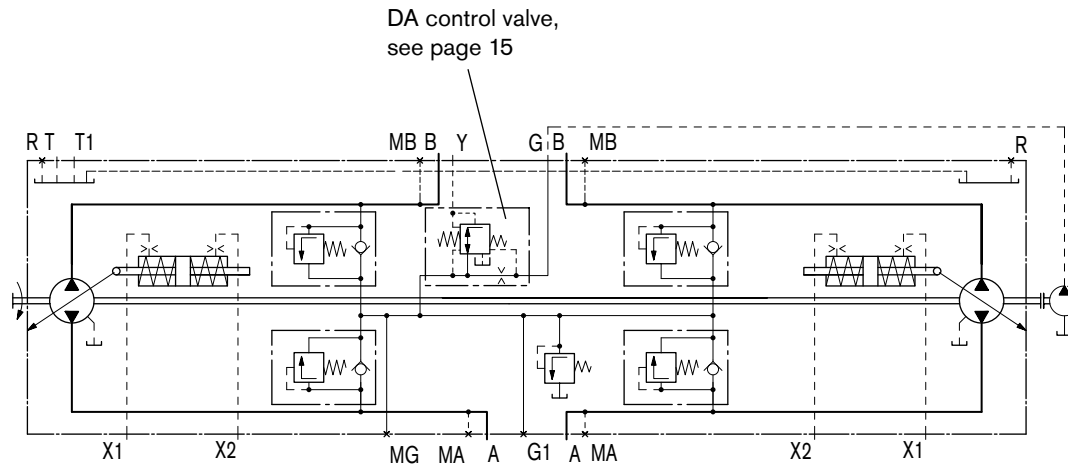

### Assignment

#### Direction of rotation - Control - Flow direction


Direction of rotation	Pump 1				Pump 2			
	clockwise		counter-clockwise		clockwise		counter-clockwise	
Control pressure	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	B to A	A to B	A to B	B to A	B to A	A to B	A to B	B to A
Operating pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>
Mechanical stroke limiter for forward drive on the side of		X <sub>1</sub>		X <sub>1</sub>		X <sub>1</sub>		X <sub>1</sub>

### Note


Port for forward drive via X<sub>2</sub> for clockwise rotation.

# ET – Electric control, direct controlled

The output flow of the pump can be steplessly varied in the range between 0 to 100 %. Depending on the preselected current I (mA) at the solenoids a and b of the pressure reduction valve, the stroke cylinder of the pump is supplied proportional with control pressure. The pump displacement that results from a certain control current is dependent on the speed and operating pressure of the pump. A different flow direction is associated with each pressure reduction valve.

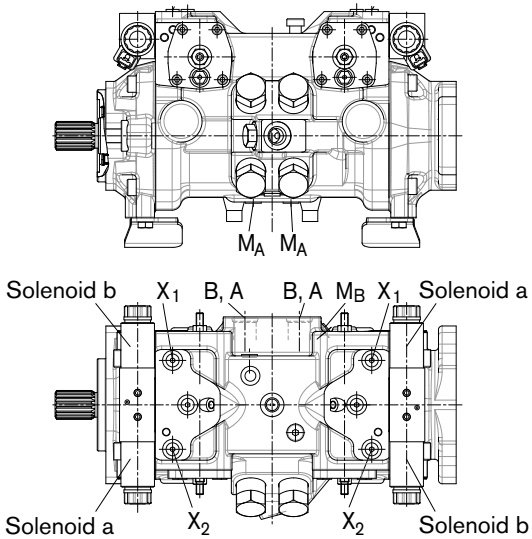

### Circuit diagram

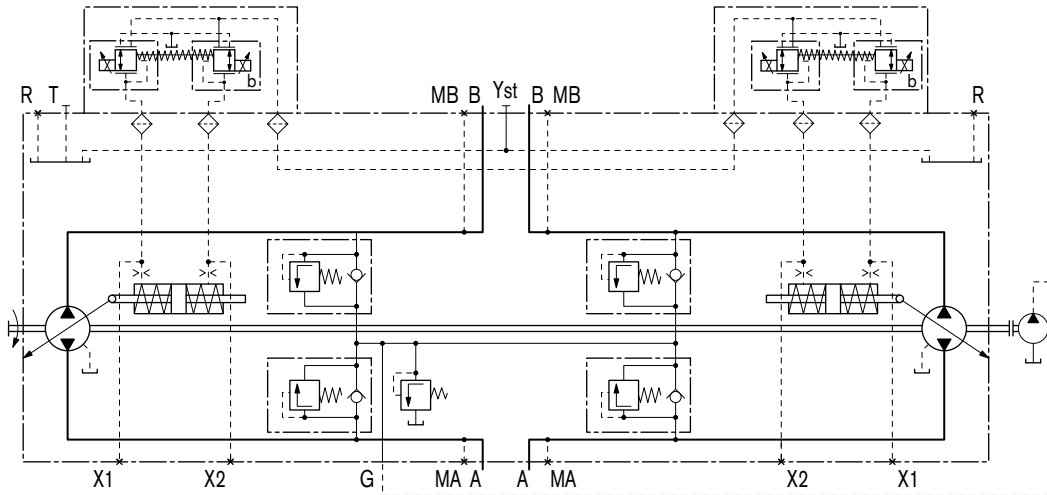

### Assignment

Direction of rotation - Control - Flow direction

Direction of rotation	Pump 1				Pump 2			
	clockwise		counter-clockwise		clockwise		counter-clockwise	
Actuation of solenoid	a	b	a	b	a	b	a	b
Control pressure	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>	X <sub>1</sub>	X <sub>2</sub>
Flow direction	B to A	A to B	A to B	B to A	B to A	A to B	A to B	B to A
Operating pressure	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>	M <sub>A</sub>	M <sub>B</sub>	M <sub>B</sub>	M <sub>A</sub>
Mechanical stroke limiter for forward drive on the side of		X <sub>1</sub>		X <sub>1</sub>		X <sub>1</sub>		X <sub>1</sub>

### Note

Port for forward drive via X<sub>2</sub> for clockwise rotation.

# DA control valve, fixed setting

## Speed related pilot pressure supply

The DA closed loop control is an engine speed-dependent system for travel drives. The built-in DA control valve generates a pilot pressure that is proportional to pump (engine) drive speed. This pilot pressure is directed to the stroke cylinder of the pump by an electromagnetically actuated 4/3-directional valve. The pump displacement can be steplessly varied in each flow direction and is influenced by both the speed of the pump drive and the system pressure. The flow direction (i. e. machine moving forwards or backwards) is determined by either solenoid a or b being activated.

Increasing the drive speed of the pump generates a higher pilot pressure from the DA control valve resulting in increased flow and/or delivery pressure from the pump.

Depending on the selected operating characteristics of the pump, increasing the system pressure (i. e. machine load) will have the effect of swiveling the pump back to a smaller displacement. An overload protection circuit for the engine (against stalling) is achieved by combining this pressure-dependent reduction in pump stroke with a reduction in pilot pressure as the engine speed drops.


Any additional power requirement, e. g. hydraulic functions from attachments, could cause the speed of the engine to drop further. This will cause a further reduction in pilot pressure and thus of the pump displacement. Automatic power distribution and full exploitation of the available power are achieved in this way, both for the travel drive and for the implement hydraulics, with priority given to the implement hydraulics.

Various override options are available for the DA control function to allow controlled operation of the implement hydraulics with high rpm at reduced vehicle speed.

The DA control valve can also be used in pumps with HT, EP and HW control units to protect the combustion engine against overload.

*DA closed loop control is only suitable for certain types of drive system and requires review of the engine and vehicle parameters to ensure that the pump is used correctly and that machine operation is safe and efficient. We recommend that all DA applications be reviewed by a Rexroth application engineer.*

## Circuit diagram

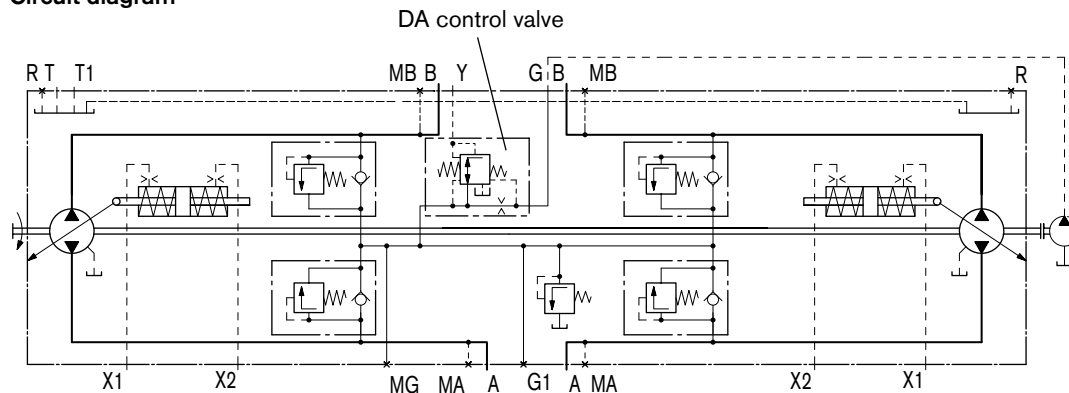






# Dimensions size 45

Before finalizing your design, request a binding installation drawing. Dimensions in in (mm).

## Drive shaft

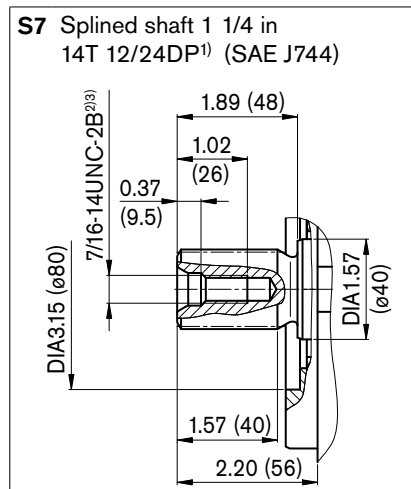

## Ports

Designation	Port for	Standard <sup>6)</sup>	Size [in] <sup>3)</sup>	Maximum pressure [psi (bar)] <sup>4)</sup>		State
				A20VG	A22VG	
A, B	Service line	ISO 11926	1 1/16-12 UN-2B; 0.79 deep	5100 (350)	6100 (420)	O
T	Case drain fluid	ISO 11926	1 1/16-12 UN-2B; 0.79 deep	45 (3)	45 (3)	O
R	Air bleed	ISO 11926	9/16-18 UNF-2B; 0.51 deep	45 (3)	45 (3)	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	ISO 11926	9/16-18 UNF-2B; 0.51 deep	580 (40)	580 (40)	X
X <sub>3</sub> , X <sub>4</sub> <sup>5)</sup>	Stroking chamber pressure	ISO 11926	7/16-20 UNF-2B; 0.47 deep	580 (40)	580 (40)	X
G	Pressure port for auxiliary circuits	ISO 11926	3/4-16 UNF-2B; 0.59 deep	580 (40)	580 (40)	O
M <sub>G</sub>	Measuring service line G	ISO 11926	9/16-18 UNF-2B; 0.51 deep	580 (40)	580 (40)	X
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	ISO 11926	9/16-18 UNF-2B; 0.51 deep	5100 (350)	6100 (420)	X

1) ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ISO 68

3) Observe the general instructions on page 28 for the maximum tightening torques.

4) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

5) Optional, see page 23

6) The spot face can be deeper than specified in the appropriate standard.


O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


# Dimensions size 45

Before finalizing your design, request a binding installation drawing. Dimensions in in (mm).

## HT – Hydraulic control, direct controlled, with DA control valve

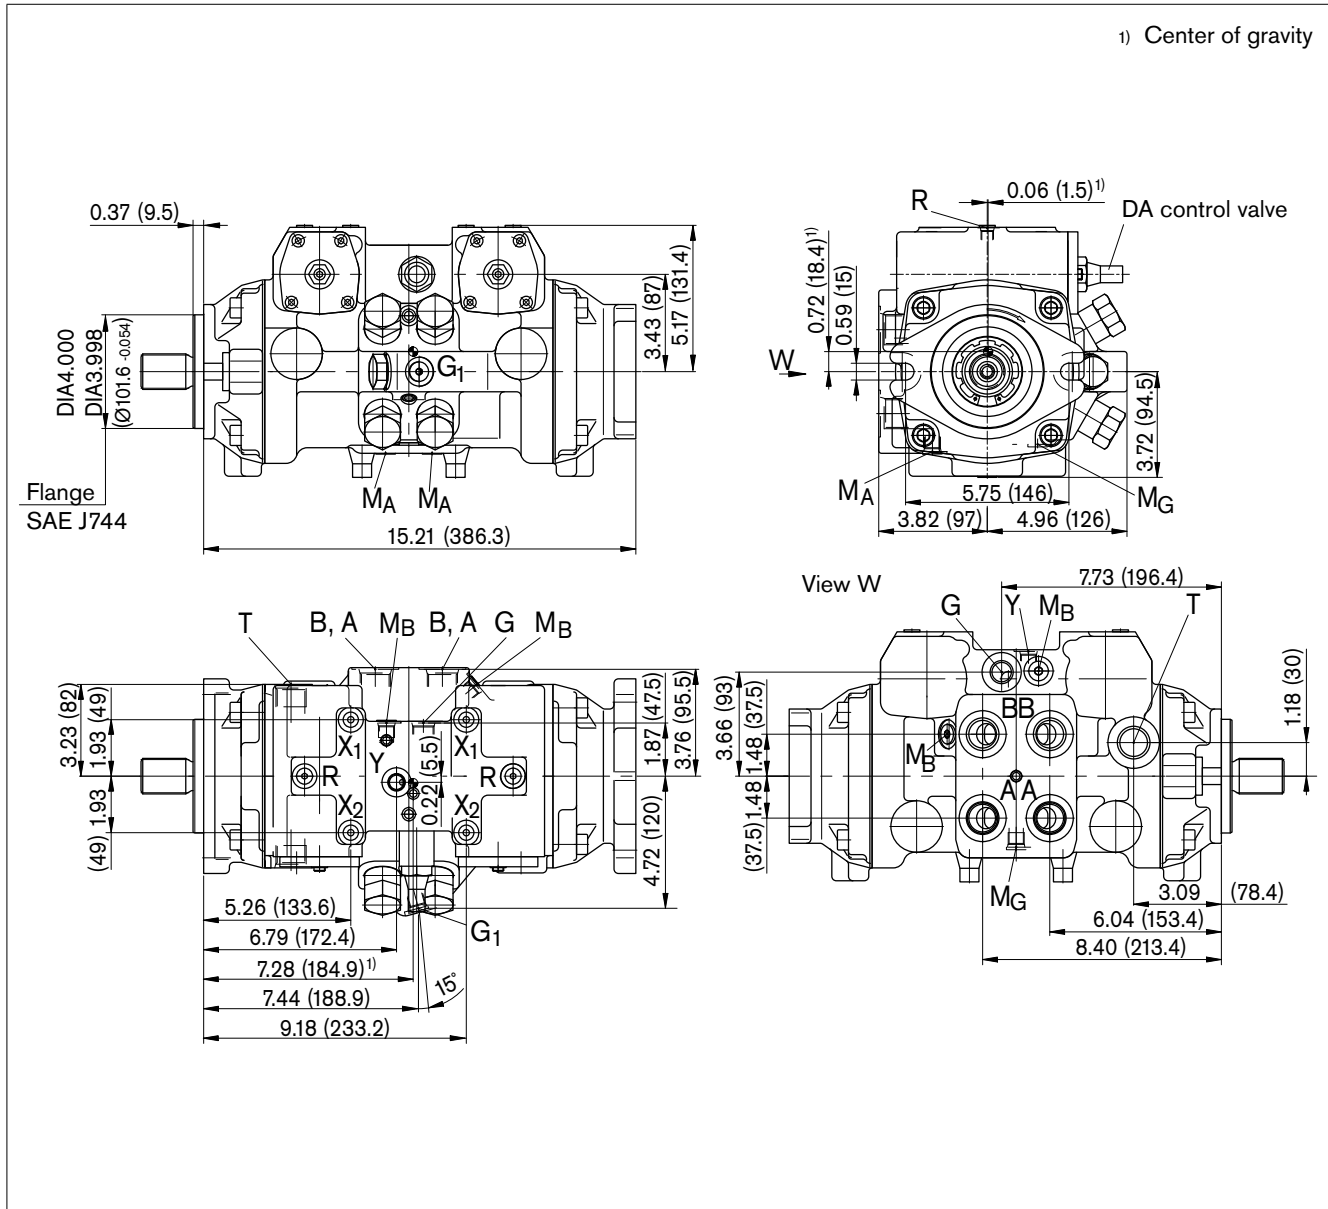


## ET – Electric control, direct controlled

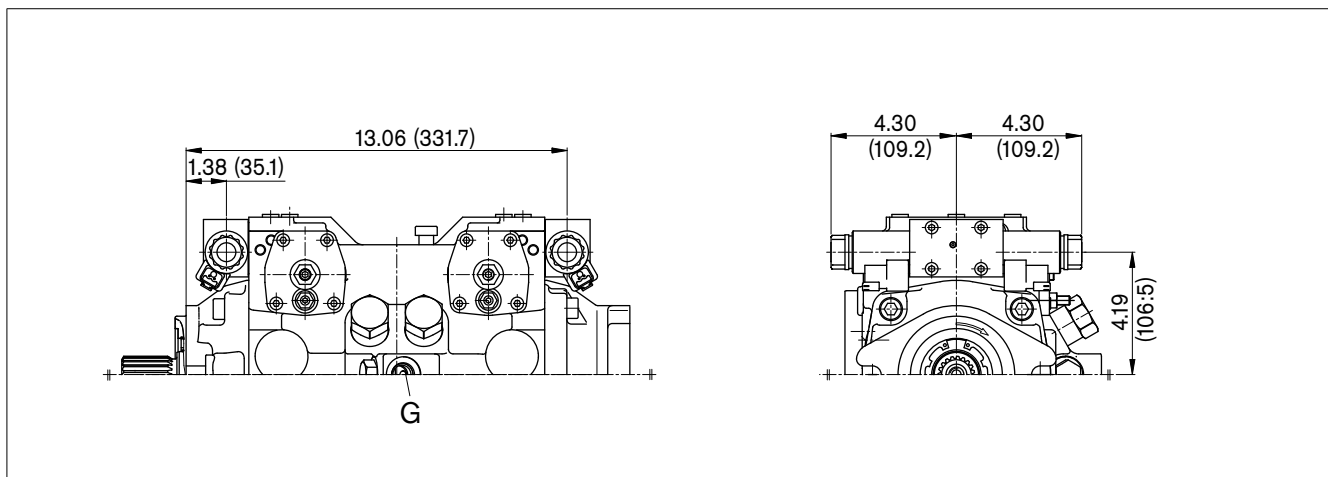


# Dimensions size 45

Before finalizing your design, request a binding installation drawing. Dimensions in in. (mm).

## Version with boost pump

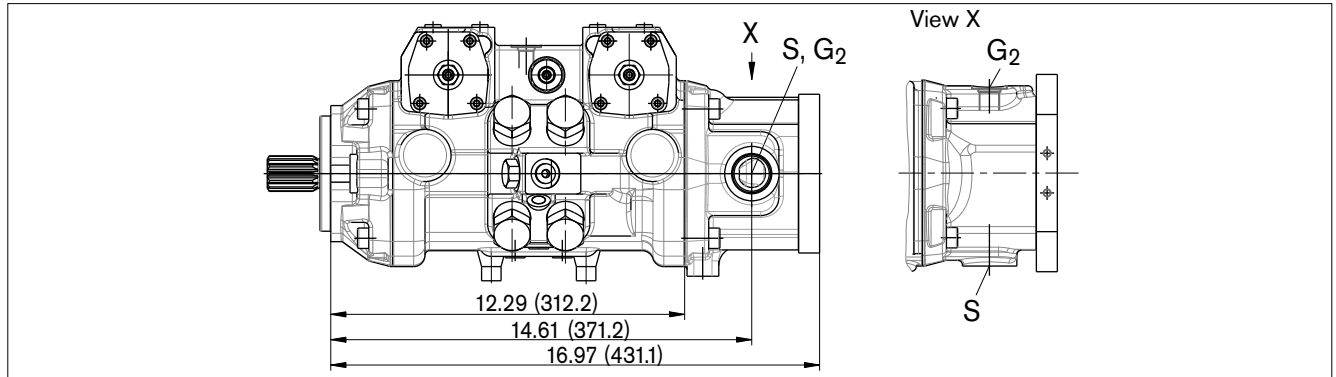

## Drive shaft

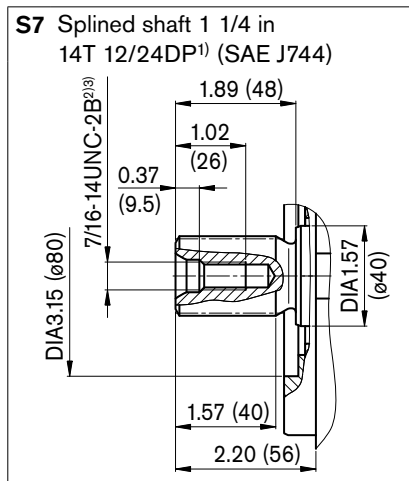

## Ports

Designation	Port for	Standard <sup>6)</sup>	Size [in] <sup>3)</sup>	Maximum pressure [psi (bar)] <sup>4)</sup>		State
				A20VG	A22VG	
A, B	Service line	ISO 11926	1 1/16-12 UN-2B; 0.79 deep	5100 (350)	6100 (420)	O
S	Suction line	ISO 11926	1 5/16-12 UN-2B; 0.79 deep	75 (5)	75 (5)	O
T	Case drain fluid	ISO 11926	1 1/16-12 UN-2B; 0.79 deep	45 (3)	45 (3)	O
R	Air bleed	ISO 11926	7/16-20 UNF-2B; 0.47 deep	45 (3)	45 (3)	X
X <sub>1</sub> , X <sub>2</sub>	Control pressure (upstream of orifice)	ISO 11926	7/16-20 UNF-2B; 0.47 deep	580 (40)	580 (40)	O
X <sub>3</sub> , X <sub>4</sub> <sup>5)</sup>	Stroking chamber pressure	ISO 11926	7/16-20 UNF-2B; 0.47 deep	580 (40)	580 (40)	X
G, G <sub>2</sub>	Pressure port for auxiliary circuits	ISO 11926	3/4-16 UNF-2B; 0.59 deep	580 (40)	580 (40)	O
G <sub>1</sub>	Pressure port for auxiliary circuits	ISO 11926	9/16-18 UNF-2B; 0.51 deep	580 (40)	580 (40)	X
M <sub>G</sub>	Measuring service line G	ISO 11926	9/16-18 UNF-2B; 0.51 deep	580 (40)	580 (40)	X
M <sub>A</sub> , M <sub>B</sub>	Measuring pressure A, B	ISO 11926	9/16-18 UNF-2B; 0.51 deep	5100 (350)	6100 (420)	X
Y	Pilot pressure port	ISO 11926	9/16-18 UNF-2B; 0.51 deep	580 (40)	580 (40)	X

1) ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to ISO 68

3) Observe the general instructions on page 28 for the maximum tightening torques.

4) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.

5) Optional, see page 23

6) The spot face can be deeper than specified in the appropriate standard.


O = Must be connected (plugged on delivery)

X = Plugged (in normal operation)


# Through drive dimensions

Before finalizing your design, request a binding installation drawing. Dimensions in in (mm).

Flange SAE J744			Coupling for splined shaft <sup>1)</sup>				
Diameter	Mounting variant		Diameter	Designation			
	Symbol <sup>2)</sup>	Designation					
Without						-	<b>0000</b>
82-2 (A)	∞	A2	5/8 in 9T 16/32DP	S2		●	<b>A2S2</b>
101-2 (B)	∞	B2	7/8 in 13T 16/32DP	S4		●	<b>B2S4</b>
			1 in 15T 16/32DP	S5		●	<b>B2S5</b>

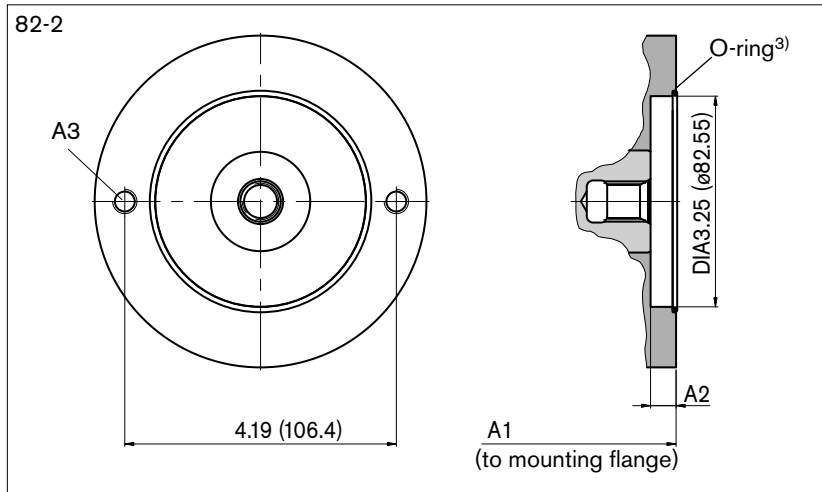

NG	A1	A2	A3 [in] <sup>4)</sup>
45 in	14.85	0.39	3/8-16 UNC-2B;
mm	377.2	10	0.69 deep

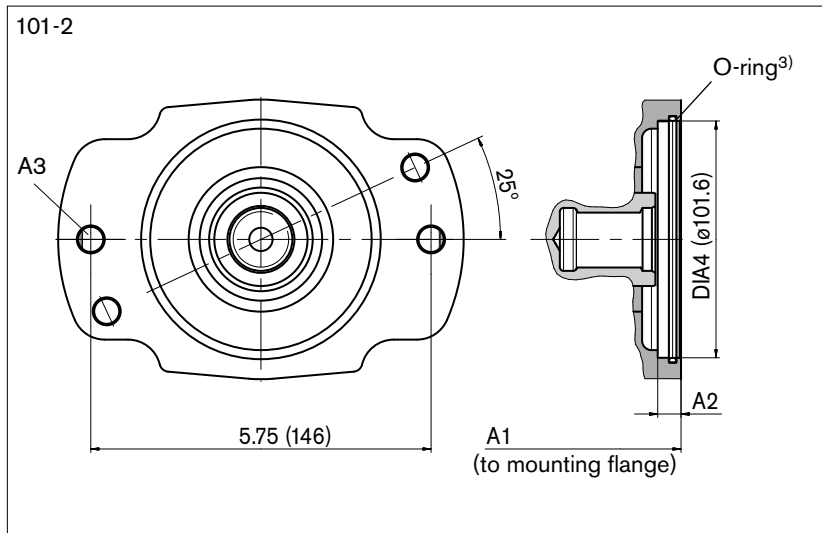

NG	A1	A2	A3 [in] <sup>4)</sup>
45 in	15.21	0.39	1/2-13 UNC-2B;
mm	386.3	10	0.73 deep

- 1) Coupling for splined shaft according to ANSI B92.1a-1976, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Order of fixing bores viewed from through drive
- 3) O-ring included in the delivery contents
- 4) Thread according to ISO 68, observe the general instructions on page 28 for the maximum tightening torques.

## Overview of attachments

Through drive			Attachment – 2nd pump		
Flange	Coupling for splined shaft	Short code	AA10VG NG (shaft)	A10V(S)O/53 NG (shaft)	External gear pump
82-2 (A)	5/8 in	A2S2	–	10 (U)	Size F NG4 to 22 <sup>1)</sup>
101-2 (B)	7/8 in	B2S4	18 (S)	28 (S, R) 45 (U, W)	Size N NG20 to 32 <sup>1)</sup> Size G NG38 to 45 <sup>1)</sup>
	1 in	B2S5	28 (S), 45 (S)	45 (S, R) 60 (U, W)	–

1) Rexroth recommends special versions of the gear pumps. Please contact us.

## Combination pumps

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes.

When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a "+".

### Order example:

**A20VG045HT100100/11ARNB2S73UB2S4A-0 + AZPN...**

The A20VG/A22VG variable double pump is permissible without additional supports where the dynamic acceleration does not exceed maximum  $10 g = 322 \text{ ft/s}^2 (= 98.1 \text{ m/s}^2)$ . When mounting another pump on the A20VG/A22VG, the mounting flange must be rated for the permissible mass torque.

## Boost pump

The boost pump permanently feeds a sufficient volume of fluid (feed volume) from the reservoir to the low-pressure side of the closed circuit via a check valve to compensate for internal leakage within the variable pump and consumers.

The boost pump is an internal gear pump that is driven directly via the drive shaft.


The pressure port  $G_2$  on the boost pump must be externally connected by pipe with port G by the customer. Suction or pressure filtration must be provided by the customer.

## High-pressure relief valves

The two high-pressure relief valves protect the hydrostatic transmission (pump and motor) from overload. They limit the maximum pressure in the respective high-pressure line and serve simultaneously as boost valves.

High-pressure relief valves are not working valves and are only suitable for pressure spikes or high rates of pressure change.

### Setting diagram

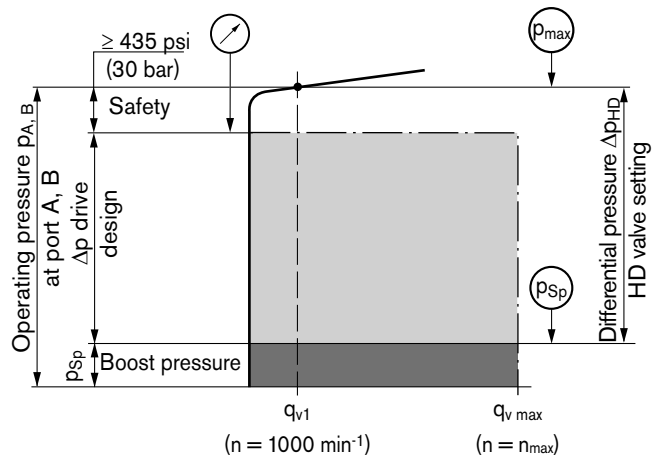

### When ordering, state differential pressure setting in plain text:

The differential pressure setting is preset in the range  $\Delta p = 3600$  to  $4650 \text{ psi}$  ( $250$  to  $320 \text{ bar}$ ) (A20VG) and  $\Delta p = 3600$  to  $5650 \text{ psi}$  ( $250$  to  $390 \text{ bar}$ ) (A22VG) in steps of  $145 \text{ psi}$  ( $10 \text{ bar}$ ).

If not specified in the order, the valves are set to  $\Delta p = 4100 \text{ psi}$  ( $280 \text{ bar}$ ) (A20VG) and  $\Delta p = 4800 \text{ psi}$  ( $330 \text{ bar}$ ) (A22VG).

### High-pressure relief valve A (for pump 1 and 2)

Differential pressure setting \_\_\_\_\_  $\Delta p_{HD} = \dots \text{ psi (bar)}$

Opening pressure of the HD valve (at  $q_{v1}$ ) \_\_\_\_\_  $p_{max} = \dots \text{ psi (bar)}$   
( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

### High-pressure relief valve B (for pump 1 and 2)

Differential pressure setting \_\_\_\_\_  $\Delta p_{HD} = \dots \text{ psi (bar)}$

Opening pressure of the HD valve (at  $q_{v1}$ ) \_\_\_\_\_  $p_{max} = \dots \text{ psi (bar)}$   
( $p_{max} = \Delta p_{HD} + p_{Sp}$ )

### Note

The valve settings are made at  $n = 1000 \text{ rpm}$  and at  $V_{g \max} (q_{v1})$ . There may be deviations in the opening pressures with other operating parameters.


# Mechanical stroke limiter

The mechanical stroke limiter is an auxiliary function allowing the maximum displacement of the pump to be steplessly reduced, regardless of the control unit used.


The stroke of the stroke cylinder and hence the maximum swivel angle of the pump are limited by means of two adjusting screws.

### Dimensions

NG	M1	M2	M3	M4	M5	M6
45 in	3.82	4	0.89	0.89	4.08	10.36
mm	97	101.5	22.5	22.5	103.6	263.2

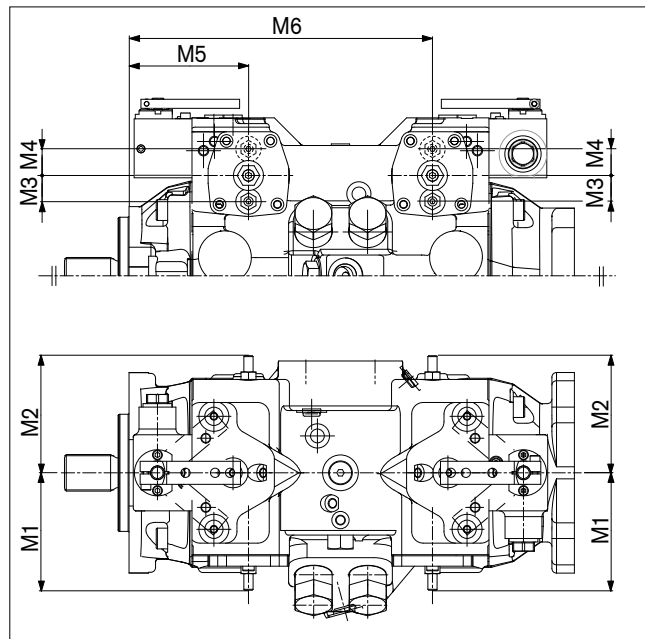


### Circuit diagram

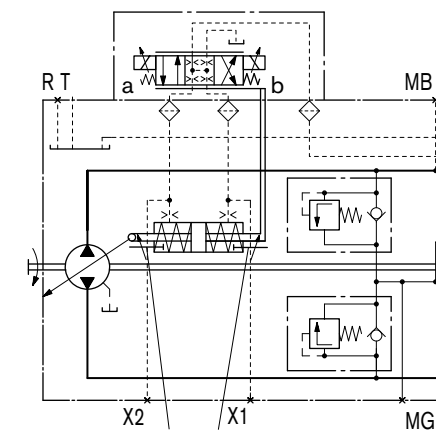


Mechanical stroke limiter, both sides

# Ports X<sub>3</sub> and X<sub>4</sub> for stroking chamber pressure

NG	T1	T2	T3	T4	T5	T6
45 in	3.13	3.11	0.93	0.83	4.08	10.36
mm	79.5	79	23.5	21	103.6	263.2

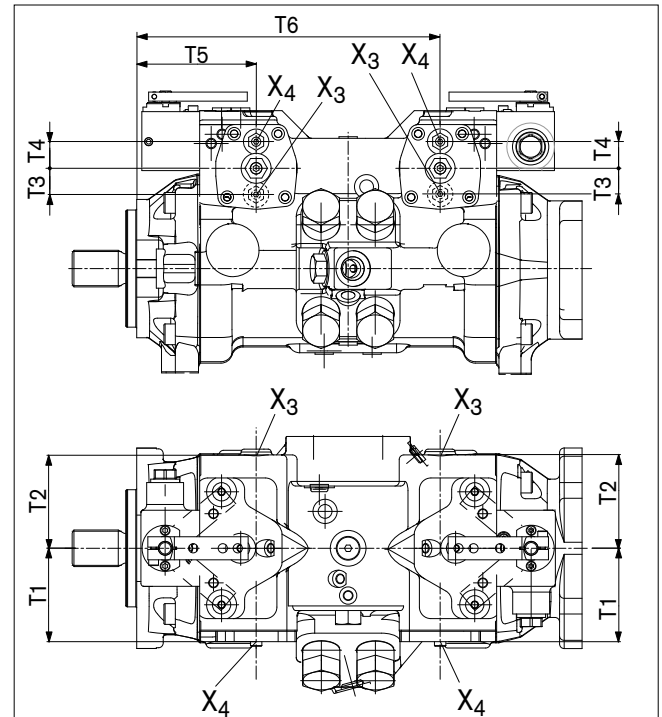

### Circuit diagram

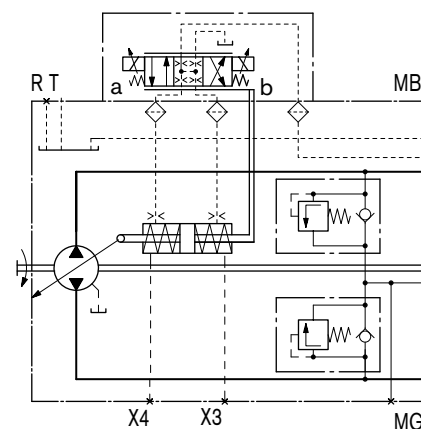

Designation	Port for	Standard <sup>3)</sup>	Size [in] <sup>1)</sup>	Maximum pressure [psi (bar)] <sup>2)</sup>		State
				A20VG	A22VG	
X <sub>3</sub> , X <sub>4</sub>	Stroking chamber pressure	ISO 11926	7/16-20 UNF-2B; 0.47 deep	580 (40)	580 (40)	X

1) Observe the general instructions on page 28 for the maximum tightening torques.  
 2) Short-term pressure spikes may occur depending on the application. Keep this in mind when selecting measuring devices and fittings.  
 3) The spot face can be deeper than specified in the appropriate standard.  
 Before finalizing your design, request a binding installation drawing. Dimensions in in (mm).

# Sensors

Before finalizing your design, request a binding installation drawing. Dimensions in in. (mm).

## Electric swivel angle sensor

For the swivel angle indicator, the pump swivel position is measured by an electric swivel angle sensor.

As an output parameter, the Hall effect swivel angle sensor delivers a voltage proportional to the swivel angle (see table of output voltages).

The swivel angle sensor is suitable for swivel angle monitoring. Please contact us if the swivel angle sensor is used for control.

### Characteristics


Supply voltage $U_b$	10 to 30 V DC		
Output voltage $U_a$	1 V ( $V_{g\ max}$ )	2.5 V ( $V_{g\ 0}$ )	4 V ( $V_{g\ max}$ )
Reverse-connect protection	Short circuit-resistant		
EMC resistance	Details on request		
Operating temperature range	-40 °F to +240 °F (-40 °C to +115 °C)		
Vibration resistance sinusoidal vibration EN 60068-2-6	10g / 5 to 2000 Hz		
Shock resistance continuous shock IEC 68-2-29	25g		
Resistance to salt spray DIN 50 021-SS	96h		
Type of protection DIN/EN 60529	IP67 and IP69K		
Case material	Plastic		

### Output voltage


	Flow direction <sup>1)</sup>	Operating pressure	Output voltage
Direction of rotation CW	B to A	$M_A$	> 2.5 V
	A to B	$M_B$	< 2.5 V
Direction of rotation CCW	A to B	$M_B$	> 2.5 V
	B to A	$M_A$	< 2.5 V

1) For flow direction, see controls

### Circuit diagram

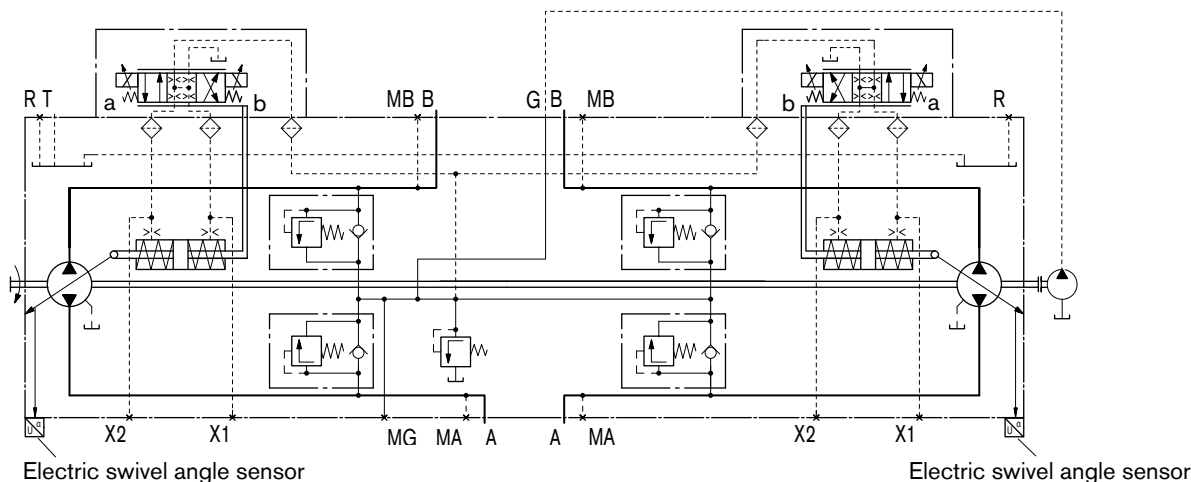

### Dimensions

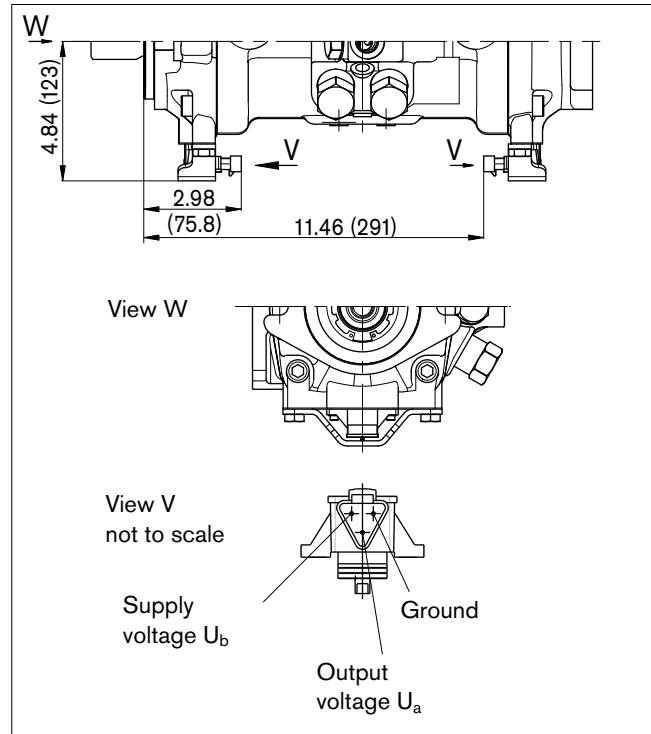

### Mating connector

DEUTSCH DT06-3S-EP04,  
Rexroth Mat. No. R902603524

Consisting of:

DT designation

- 1 case \_\_\_\_\_ DT06-3S-EP04
- 1 wedge \_\_\_\_\_ W3S
- 3 female connectors \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents. This can be supplied by Rexroth on request.



# Installation situation for coupling assembly


Before finalizing your design, request a binding installation drawing. Dimensions in in (mm).

To ensure that rotating components (coupling hub) and fixed components (case, retaining ring) do not come into contact with each other, the installation conditions described here must be observed. This depends on the size and the splined shaft.

## SAE splined shaft (spline according to ANSI B92.1a-1976)

The outer diameter of the coupling hub must be smaller than the inner diameter of the retaining ring  $d_2$  in the area near the drive shaft collar (dimension  $x_2 - x_3$ ).

Please observe diameter  $d_5$  of the free turning.

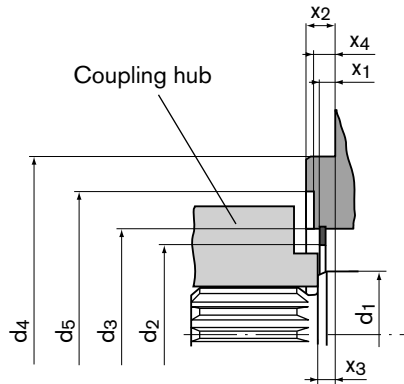

NG	Mounting flange		$\varnothing d_1$	$\varnothing d_{2 \text{ min}}$	$\varnothing d_3$	$\varnothing d_4$	$\varnothing d_5$	$x_1$	$x_2$	$x_3$ (approx.)	$x_4$
45	101-2 (B)	in	1.57	2.02	2.48 ±0.004	4	3.15	0.169	0.374 <sub>-0.02</sub>	0.28	0.315 <sub>-0.024</sub>
		mm	40	51.4	63 ±0.1	101.6	80	4.3	9.5 <sub>-0.5</sub>	7	8 <sub>-0.6</sub>

# Connector for solenoids

## DEUTSCH DT04-2P-EP04, 2-pin


Molded, without bidirectional suppressor diode \_\_\_\_\_ P

Type of protection according to DIN/EN 60529 \_\_\_\_\_ IP67

Type of protection according to DIN 40050-9 \_\_\_\_\_ IP69K

### Circuit symbol

Without bidirectional suppressor diode




### Mating connector

DEUTSCH DT06-2S-EP04  
Rexroth Mat. No. R902601804

- Consisting of:
- 1 case \_\_\_\_\_ DT designation
  - 1 wedge \_\_\_\_\_ W2S
  - 2 female connectors \_\_\_\_\_ 0462-201-16141

The mating connector is not included in the delivery contents. This can be supplied by Rexroth on request.

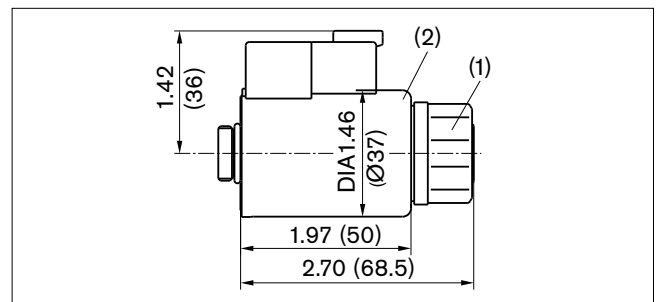

### Changing connector position

If necessary, you can change the position of the connector by turning the solenoid.

To do this, proceed as follows:

1. Loosen the fixing nut (1) of the solenoid. To do this, turn the fixing nut (1) one turn counter-clockwise.
2. Turn the solenoid body (2) to the desired position.
3. Retighten the fixing nut. Tightening torque of the fixing nut: 3.7+0.7 lb-ft (5+1 Nm) (WAF1.02 (26), 12-sided DIN 3124)

On delivery, the position of the connector may differ from that shown in the brochure or drawing.

# Installation instructions

## General

During commissioning and operation, the axial piston unit must be filled with hydraulic fluid and air bled. This is also to be observed following a relatively long standstill as the axial piston unit may empty via the hydraulic lines.

The case drain fluid in the pump case must be directed to the tank via the highest tank port (T).

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction and case drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height  $h_s$  results from the overall loss of pressure, it must not, however, be higher than  $h_{S_{max}} = 31.5$  in (800 mm). The minimum suction pressure at port S must also not fall below 12 psi (0.8 bar) absolute during operation (cold start 7.5 psi (0.5 bar) absolute).

## Installation Position

See the following examples 1 to 16. Additional installation positions are available upon request.

Recommended installation position:


- Without boost pump 1 and 2.
- With boost pump 5 and 6

## Note

- If a filling of the stroking chambers via X1 to X4 in the final installation position is not possible, then this must be effected before installation.
- To prevent unexpected actuation and damage, the stroking chambers must be air bled via the ports X1, X2, and/or X3, X4 in accordance with the installation positions.

## Below-tank installation (standard)

Below-tank installation is when the axial piston unit is installed outside of the tank below the minimum fluid level.

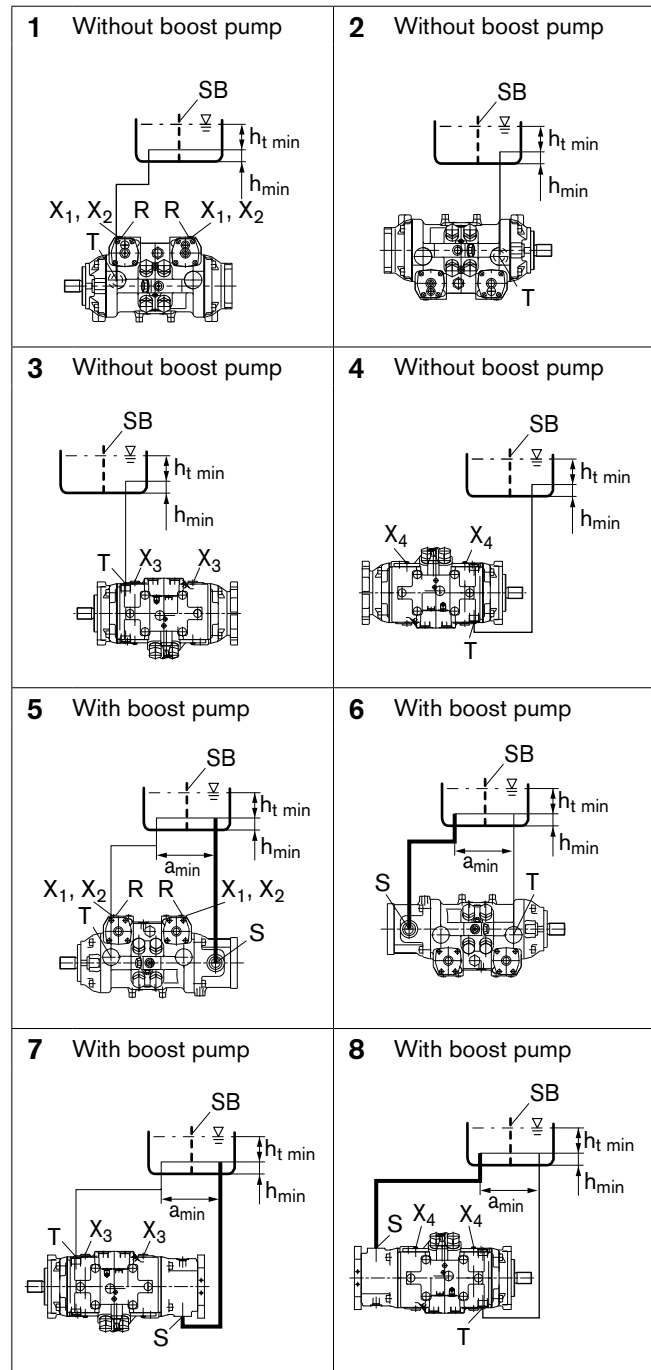

Installation Position	Air bleed case	Air bleed stroking chamber	Filling
1	R	X1, X2	T + X1 + X2
2	-	-	T
3	-	X3	T + X3
4	-	X4	T + X4
5	R	X1, X2	S + T + X1 + X2
6	-	-	S + T
7	-	X3	S + T + X3
8	-	X4	S + T + X4


Observe the notes!

# Installation instructions

## Above-tank installation

Above-tank installation is when the axial piston unit is installed above the minimum fluid level of the tank.

Observe the maximum permissible suction height  
 $h_{S \max} = 31.5 \text{ in (800 mm)}$

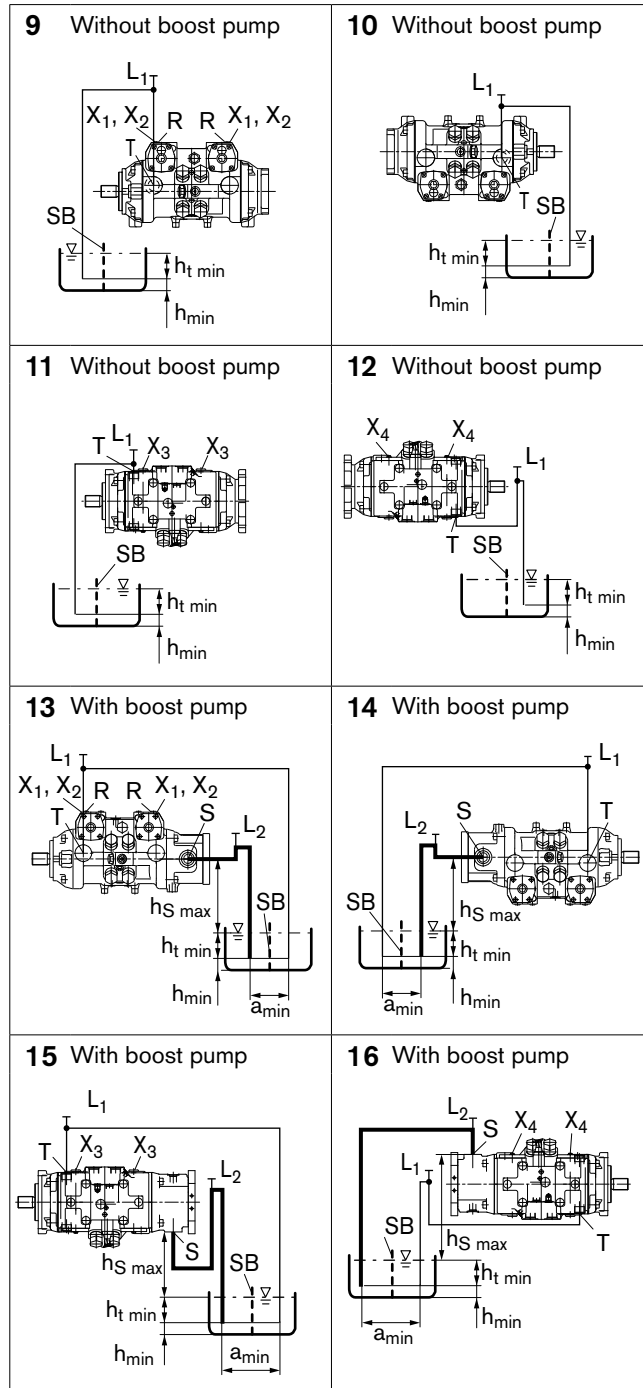

Installation Position	Air bleed case	Air bleed stroking chamber	Filling
9	R	X <sub>1</sub> , X <sub>2</sub>	L <sub>1</sub> + X <sub>1</sub> + X <sub>2</sub>
10	L <sub>1</sub>	-	L <sub>1</sub>
11	L <sub>1</sub> (T)	X <sub>3</sub>	L <sub>1</sub> (T) + X <sub>3</sub>
12	L <sub>1</sub>	X <sub>4</sub>	L <sub>1</sub> + X <sub>4</sub>
13	R + L <sub>2</sub> (S)	X <sub>1</sub> , X <sub>2</sub>	L <sub>1</sub> + L <sub>2</sub> (S) + X <sub>1</sub> + X <sub>2</sub>
14	L <sub>1</sub> + L <sub>2</sub> (S)	-	L <sub>1</sub> + L <sub>2</sub> (S)
15	L <sub>1</sub> (T) + L <sub>2</sub>	X <sub>3</sub>	L <sub>1</sub> (T) + L <sub>2</sub> + X <sub>3</sub>
16	L <sub>1</sub> + L <sub>2</sub> (S)	X <sub>4</sub>	L <sub>1</sub> + L <sub>2</sub> (S) + X <sub>4</sub>

Observe the notes on page 26!

- L** Filling / air bleed
- R** Air bleed port
- S** Suction port
- T** Tank port
- SB** Baffle (baffle plate)
- h<sub>t min</sub>** Minimum permissible immersion depth (7.87 in (200 mm))
- h<sub>min</sub>** Minimum permissible spacing to tank base (3.94 in (100 mm))
- h<sub>S max</sub>** Maximum permissible suction height (31.5 in (800 mm))
- a<sub>min</sub>** When designing the tank, ensure adequate distance between the suction line and the case drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

# General instructions

- The A20VG/A22VG pump is designed to be used in a closed circuit.
- Project planning, installation and commissioning of the axial piston unit requires the involvement of qualified personnel.
- Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, these can be requested from Rexroth.
- During and shortly after operation, there is a risk of burns on the axial piston unit and especially on the solenoids. Take appropriate safety measures (e.g. by wearing protective clothing).
- Depending on the operational state of the axial piston unit (operating pressure, fluid temperature), the characteristic may shift.
- Service line ports:
  - The ports and fixing threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified operating conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
  - The service line ports and function ports are only designed to accommodate hydraulic lines.
- The data and notes contained herein must be adhered to.
- The product is not approved as a component for the safety concept of a general machine according to DIN EN ISO13849.
- The following tightening torques apply:
  - Fittings:
    - Observe the manufacturer's instruction regarding the tightening torques of the used fittings.
  - Fixing screws:
    - For fixing screws according to DIN 13/ ISO 68 , we recommend checking the tightening torque individually according to VDI 2230.
  - Threaded hole for axial piston unit:
    - The maximum permissible tightening torques  $M_{G \max}$  are maximum values for the threaded holes and must not be exceeded. For values, see the following table.
  - Locking screws:
    - For the metal locking screws supplied with the axial piston unit, the required tightening torques of the locking screws  $M_V$  apply. For values, see the following table.

Ports		Maximum permissible tightening torque of the threaded holes $M_{G \max}$	Required tightening torque of the locking screws $M_V$	WAF hexagon socket for the locking screws
Standard	Threaded sizes			
ISO 11926	7/16-20 UNF-2B	30 lb-ft	11 lb-ft	3/16 in
		40 Nm	15 Nm	
	9/16-18 UNF-2B	59 lb-ft	18 lb-ft	1/4 in
		80 Nm	25 Nm	
	3/4-16 UNF-2B	118 lb-ft	46 lb-ft	5/16 in
		160 Nm	62 Nm	
	1 1/16-12 UN-2B	266 lb-ft	108 lb-ft	9/16 in
		360 Nm	147 Nm	
	1 5/16-12 UN-2B	398 lb-ft	146 lb-ft	5/8 in
		540 Nm	198 Nm	

Bosch Rexroth Corporation  
 Hydraulics  
 Axial & Radial Piston Units  
 8 Southchase Court  
 Fountain Inn, SC 29644-9018, USA  
 Telephone (864) 967-2777  
 Facsimile (864) 967-8900  
 www.boschrexroth-us.com

© 2010 Bosch Rexroth Corporation

All rights reserved. Neither this document, nor any part of it, may be reproduced, duplicated, circulated or disseminated, whether by copy, electronic format or any other means, without the prior consent and authorization of Bosch Rexroth Corp.

The data and illustrations in this brochure/data sheet are intended only to describe or depict the products. No representation or warranty, either express or implied, relating to merchantability or fitness for intended use, is given or intended by virtue of the information contained in this brochure/data sheet. The information contained in this brochure/data sheet in no way relieves the user of its obligation to insure the proper use of the products for a specific use or application. All products contained in this brochure/data sheet are subject to normal wear and tear from usage.

Subject to change.